

All in One Wi-Fi IP-PBX Model : LHVP12

LHVP12 Wi-Fi IP-PBX is all in One Design which has 100 minutes of voice mail storage capacity and all calling features. By it Call can be route to extension or an outside line. LHVP12 Wi-Fi IP – PBX has built-in web server for configuration. It acts as a wifi-router, Switch, IP-PBX & Media gateway.




Features

- SIP Proxy Server (RFC 3261)
- Analog Telephone FXO / FXS Interface
- Internet Router WAN / LAN, Wireless A.P.
- 10 unique auto attendants
- 100 minutes of Voicemail storage capacity
- Call Transfer, Call Forward, Call Pickup, Call Park
- DID, DND
- Configurable dialling plan
- Caller ID
- Dial by Number or Name
- Speed dialling, Follow-me

Applications

- Best suited for small or home office uses.
- In the sub offices of the large industries.

Application Diagram

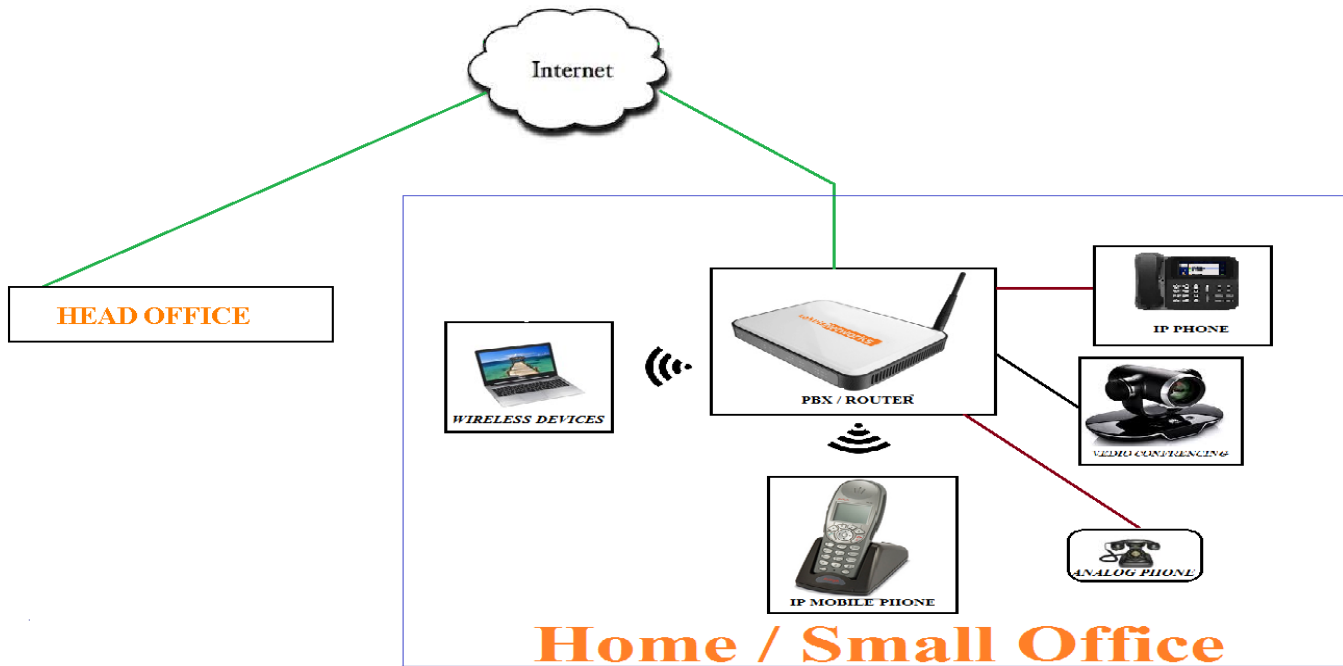

Technical Specifications

Parameters	Specifications
Phone Interface	2 FXO (PSTN) & 2 FXS (Extension) Max 12 user extensions Supports both Analog & SIP Extensions
Audio	G.711 a-Law & u-Law, G.723.1, and G.729a DTMF tone generation & detection
Network Interface	One RJ-45 10/100 Base-T WAN ports Three switched RJ-45 10/100 Base-T LAN ports Wireless LAN 802.11 b/g
Networking	WAN: DHCP client / Static / PPPoE IP Assignment LAN: DHCP server with NAT Router Build-in WMM & QoS supported
Administration	Built-in web server for configuration IVR commands setting by Extensions Auto Provisioning
Electrical Information	Support up to 8 SIP proxies upper registration Power Supply: Output 12V DC/ Input 100-240 Volt AC Adapter
VoIP Trunking	Supports PSTN Trunks